

WeatherBest™ Shutter Lifetime Warranty

East Iowa Plastics, Inc. provides the industry's only lifetime warranty on fading, warping, breaking cracking, denting or splitting. Simply return defective shutters to place of purchase with proof of purchase.

East Iowa Plastics, Inc. will not be held liable for any direct, indirect, incidental, special or consequential damages. The manufacturer assumes no responsibility for failure or damage due to improper installation. Our liability will not exceed the replacement of the defective shutter itself. Installation costs will not be included.

INSTALLATION INSTRUCTIONS

- Tools Required:**
1. 1 medium sized Phillips Screwdriver.
 2. Color Coordinated Screws (provided)
 3. A drill with a 3/16 in (4.75 mm) bit
 4. Safety Glasses

Aligning:

Place shutter next to window in the desired location. (Fig 1) Mark screw hole location with a pencil. Screw should be located 4 - 6 inches (10.15 -15.24 cm) from the top & bottom of shutter, and within 1in (2.54cm) above where the siding makes contact with the shutter. This allows for maximum screw penetration. (Fig 2) The remaining screw holes should be located an equal distance from each other in the same fashion.

Drilling:

Drill 3/16in (4.75mm) diameter holes, centered on side-rails at marked locations. Drilling should be done on ground or bench. **DO NOT DRILL INTO HOUSE SIDING.**

Fastening:

Place shutter next to window at pre-marked location. Place screws through previously drilled holes in shutter and tap to start them. Tighten screws only until they touch the shutter surface. **DO NOT DOWN TIGHTLY.**

Number of screws needed for various shutter sizes:
24 in - 51 in: Use 4 screws per shutter (2 per side)
55 in - 80 in: Use 6 screws per shutter (3 per side)

Brick, Stone or Masonry:

When mounting on brick, stone or other masonry products, locate screw holes so they enter mortar joints. Drill holes to accept a suitable masonry anchor (purchased separately) and attach shutter with screws provided. (Fig 3)

CLEANING AND PAINTING

Spraying with medium water pressure from a garden hose can quickly renew the attractive wood grain appearance and original luster of the shutters. Dirt and leaves can be easily removed with a sponge or light brushing. **DO NOT USE CLEANING FLUIDS OR ABRASIVES.** Your shutters may be painted with a good quality exterior acrylic paint. No priming is necessary. Shutter must be clean and free of contaminants before painting. Test small section for adhesion before completely painting.

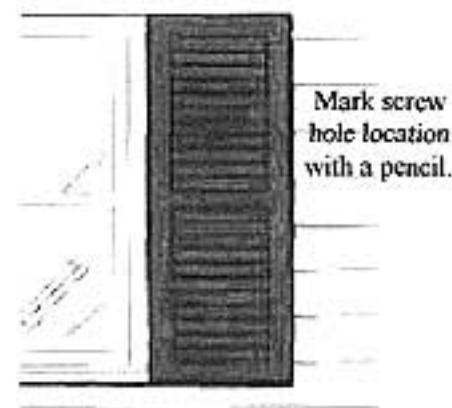


Figure 1

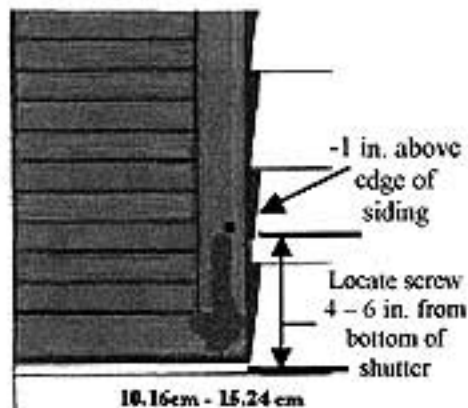


Figure 2

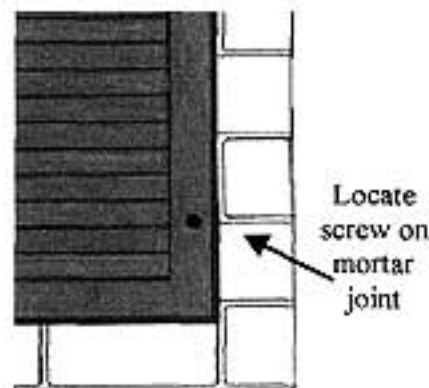


Figure 3